

EXPII-RX 5050P

Pedestrian security door with integrated reader.

ExPII-RX 5050P. The full height security gate is designed to open indivi - dually or work in conjunction with full height turnstiles. Ideal for controlling access for package deliveries, trolleys, wheelchairs, etc.

Color can be customized according to the installation environment, material is optional. Dimensions can be customized according to your needs and logo can be personalized.

3 years warranty. Easy to install and maintain. Includes integrated support for any type of access control system.

EXPII-RX Steel Security Door

Pedestrian security door with integrated reader.







Barcode and QR reader



Remote control



Non-contact




Palm of hand **Fingerprint**

Technical Specifications

Frame material	Full 304 stainless steel
Dimensions	1200 * 260 * 2300 mm
Inside height	2080 mm
Clearance width	900 mm
Direction of passage	Unidirectional and Bidirectional
Net weight	65kg/unit
MCBF	10 million
Power supply	AC220V/110V, 50/60Hz
Operating voltage	24V DC
Power consumption	40W
Operating temperature	-15°C - 60°C
Operating humidity	0 ~ 95% (no freezing)
Operating environment	Indoor / Outdoor
Flow rate	30 persons per minute
LED indicator	Two LED indicators on top
Communication	Dry contact, relay signal, RS485
Flexibility	Integration with any access control
Emergency	Door opens automatically

Dimensions (mm)

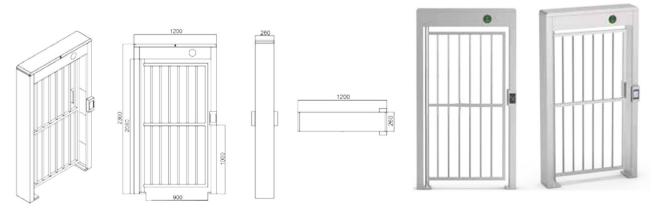

Product specifications are subject to change without notice

