



3Years Warranty

EXPLL-RX 5060D

Pedestrian security door with integrated reader.

ExPLL-RD 5060D. The full -height safety door is designed to open indivi - dually or work in conjunction with full-height turnstiles. Fire safety requirements, the door opens automatically.

The color can be customized according to the installation environment, the material is optional. Dimensions can be customized according to your needs and logo can be personalized.

3 years warranty. Easy to install and maintain. Includes integrated support for any type of access control system.

EXPII-RX Steel + varnish Security Door

Pedestrian security door with integrated reader.



Card Reader



Barcode and QR reader



Remote control



Non-contact



Fingerprint



Face




Palm of hand

Technical Specifications

Frame material	Full 304 stainless steel
Dimensions	1200 * 260 * 2300 mm
Inside height	2080 mm
Clearance width	900 mm
Direction of passage	Unidirectional and Bidirectional
Net weight	65kg/unit
MCBF	10 million
Power supply	AC220V/110V, 50/60Hz
Operating voltage	24V DC
Power consumption	40W
Operating temperature	-15°C - 60°C
Operating humidity	0 ~ 95% (no freezing)
Operating environment	Indoor / Outdoor
Flow rate	30 persons per minute
LED indicator	Two LED indicators on top
Communication	Dry contact, relay signal, RS485
Flexibility	Integration with any access control
Emergency	Door opens automatically

Dimensions (mm)

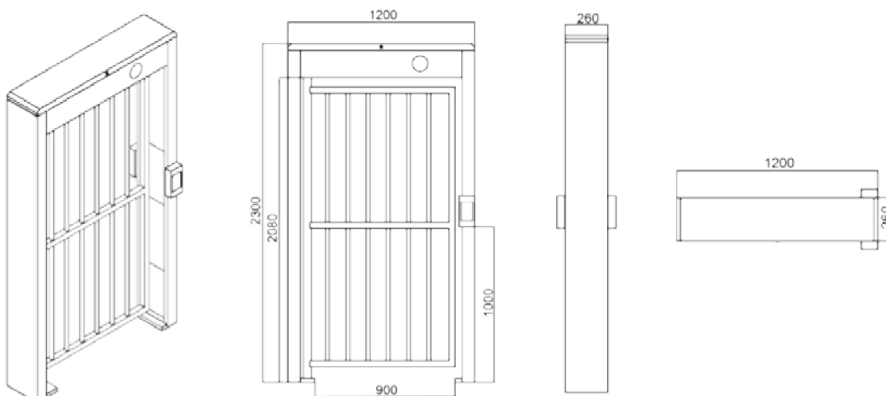

Product specifications are subject to change without notice