



EXPLL-RX Seaco 240

Fast opening speed of 0.1sec. 55 persons/min.

ExPLL -RX Seaco 240. The perfect turnstile for sites with a high flow of visitors. 55 people per minute. Supports 600mm -1100 mm for wide step, wheelchairs, baby carriages, etc. Indoor use. Green and red LED pictograms for passage status.

The width and height of the arm glass are optional. Color can be customized. Customized logo on glass sheets. Optional number of infrared sensors. Optional water-proof.


3-year warranty. Easy to install and maintain. Low noise level. Low energy consumption. Fire safety requirements; arms open automatically.

EXPII-RX Seaco 240 Turnstile

Fast opening speed of 0.1sec. 55 persons/min.



Card Reader



QR Code Reader




Biometric Readers



Technical Specifications

Material	Steel / White and black stoving varnish / Tempered glass
Arm material	Plexiglas - transparency
Dimensions	1400 * 120 * 978 mm
Net weight	75kg/pcs (single core), 95kg/pcs (double core)
Passage width	600mm (standard), 1100mm max. (handicap)
Arm height	900mm (standard), 1800mm max. (optional)
Passing direction	Single directional and Bi-directional
MCBF	15 million
Power supply	AC220V/110V, 50/60 Hz
Operating voltage	24V DC
Power consumption	40W
Operating temperature	-20°C - 75°C
Operating humidity	0 ~ 95% (no freeze)
Working environment	Indoor / Outdoor (shelter)
Flow rate	55 people per minute
LED indicator	Two LED indicators on top
Infrared sensor	16 sensors (optional)
Communication	Dry contact, Relay signal, RS485
Flexibility	Integrate with any access control

Dimensions (mm)

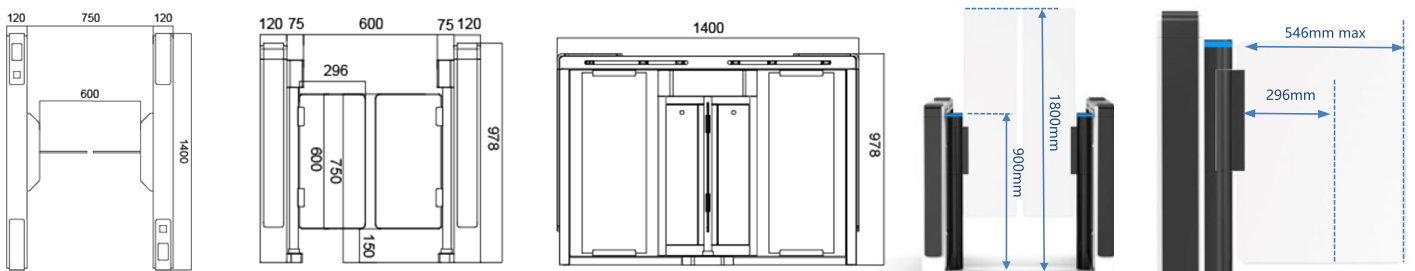

Optional high glass

Optional wide track

Product specifications are subject to change without notice.