

EXPFT-200-12V

12 Volt 200 Amp.
Front Terminal Battery




Physical Specification

Part Number:	EXPFT-200-12V
Length:	560 ± 2mm (22.05 inches)
Width:	125 ± 2mm (4.92 inches)
Container Height:	320 ± 2mm (12.60 inches)
Total Height (with terminal):	320 ± 2mm (12.60 inches)
Approx Weight:	59.5 Kg (131.1 lbs)



Dimensions

M8 Terminal



Specifications

	Nominal Voltage (C10,1.80V/cell)	12V 200AH
Terminal Option	M8	
Container Material	Standard Option Flame Retardant Option (FR)	ABS ABS (UL94:VO)
Rated Capacity	(20hr,10.5A,1.80V/cell)	210.0 Ah
	(10hr,20.0A,1.80V/cell)	200.0 Ah
	(8hr,24.4A,1.75V/cell)	195.2 Ah
	(5hr,35.0A,1.75V/cell)	175.0 Ah
	(1hr,118.1A,1.67V/cell)	118.1 Ah
Max Discharge Current (5s)	2000 A	
Internal Resistance	Approx.3.0mΩ	
Discharge Characteristics		Discharge: -15°C~50°C (5°F~122°F)
	Operating Temp. Range	Charge: 0°C~40°C (32°F~104°F) Storage: -15°C~40°C (5°F~104°F)
	Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)
	Cycle Use	Initial Charging Current less than 1.05A. Voltage 14.1V~14.4V at 25°C (77°F) Temp. Coefficient 30-mV/°C
	Self Discharge	No limit on Initial Charging Current Voltage 13.5V~13.8 V at 25°C (77°F) Temp. Coefficient 20-mV/°C
	Capacity affected by Temperature	40°C (104°F) 103%
		25°C (77°F) 100%
		0°C (32°F) 86%
Design Floating Life at 20°C	12+ Years	
Self Discharge	EXPLL deep cycle batteries may be stored for up to 6 months at 25°C (77°F) and then a refresh charge is required. For higher temperatures the time interval will be shorter. Self-discharge is less than 2%	


Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	287.5	256.2	226.7	185.7	143.2	97.3	63.3	47.7	38.0	31.8	28.7	22.4	18.7	9.80
1.80V/cell	334.0	298.0	252.9	199.6	151.4	107.6	68.8	51.6	41.0	34.2	29.5	23.7	20.0	10.5
1.75V/cell	368.6	315.2	269.6	207.6	156.1	111.3	70.9	53.0	42.0	35.0	29.9	24.4	20.3	10.7
1.70V/cell	392.5	333.1	280.4	214.7	159.1	115.7	73.2	54.6	43.1	35.8	30.3	24.9	20.6	10.8
1.67V/cell	410.4	343.6	286.3	219.1	162.5	118.1	74.4	55.4	43.7	36.2	30.6	25.1	20.8	10.9
1.60V/cell	428.3	368.0	294.7	223.5	164.9	123.9	77.5	57.4	45.1	37.4	30.9	25.7	21.3	11.2


Constant Power Discharge (Watts/cell) at 25°C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	536.8	491.0	431.8	357.7	278.0	188.6	123.3	93.3	74.5	62.4	57.1	44.2	37.0	19.8
1.80V/cell	616.5	565.0	474.8	378.7	291.7	207.3	133.5	100.6	80.0	67.0	58.3	46.6	40.0	21.0
1.75V/cell	669.5	591.5	501.3	390.5	298.1	212.9	136.8	102.8	81.7	68.3	59.0	48.0	40.0	21.2
1.70V/cell	696.9	618.1	517.4	401.8	302.5	219.8	140.5	105.3	83.5	69.7	59.7	48.7	40.5	21.4
1.67V/cell	725.8	639.2	526.3	409.1	308.1	223.3	142.3	106.6	84.5	70.4	60.1	49.2	40.8	21.5
1.60V/cell	736.6	666.4	534.0	411.9	309.2	231.9	147.2	109.9	86.8	72.2	60.4	50.2	41.6	21.9


Discharge Characteristics

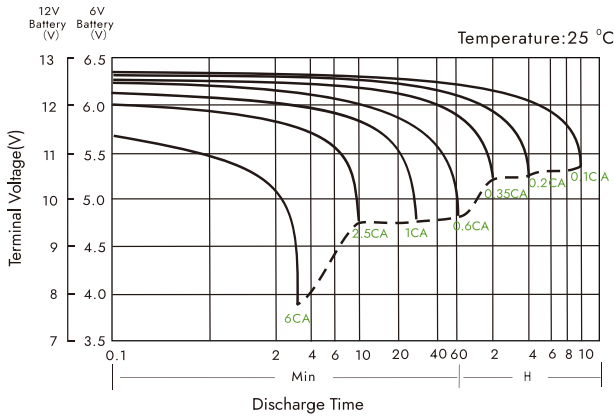


Float Charging Characteristics

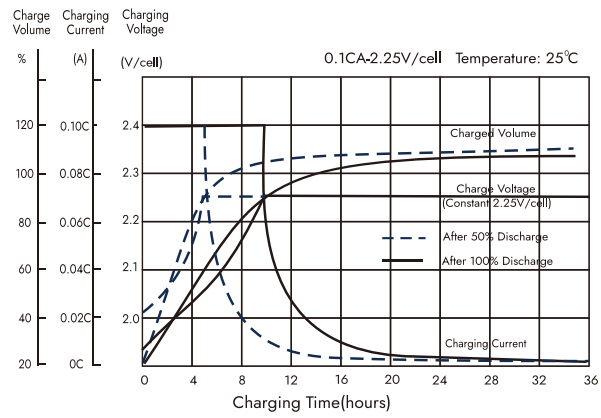

Temperature Effects in Relation to Battery Capacity

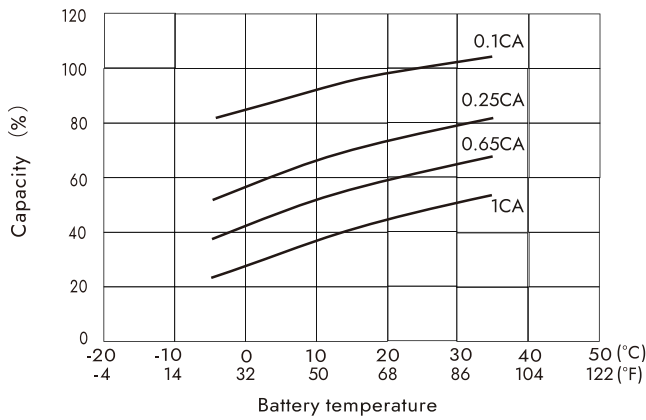

Float Service Life

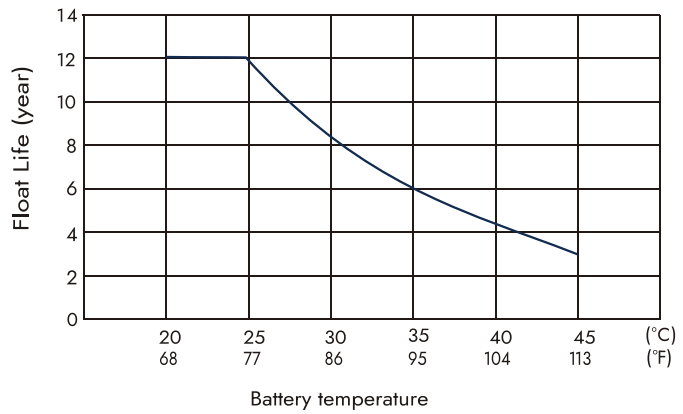

Temperature Effects in Relation to Battery Capacity

- Front terminal design
- Spill-free / Spill-proof
- Oxygen recombination technology
- Alloy plate grid
- Low self-discharge rate
- Absorbent Glass Mat (AGM)
- High power and volume rat
- Unrivalled energy density
- Valve regulated
- Extremely safe operations
- Short recharging time
- High reliability
- Rechargeable lead acid battery
- Optimum quality
- Developed by ExPII